

“ THE DITEST STA-R Series is the latest model of the fibre optic brillouin-based sensing technique pioneered by Omnisens. ”

# DITEST STA-R Series

## FIBER OPTIC DISTRIBUTED TEMPERATURE & STRAIN MONITORING SYSTEM

### > Superior monitoring performance

- Longest distance distributed sensing - 50km per channel.
- Simultaneous fast and accurate temperature and strain measurements.
- Robust optical budget supports the most demanding deployment conditions.

### > Intelligent measurement control and configuration

- Automatic measurement settings maintains highest instrument performance.
- Self-adjusting configurations to varying external conditions
- Intelligent measurement control and performance diagnostic.

### > Complex monitoring configurations made easy

- Library of pre-configured calibrated sensing elements.
- Combinations of multiple cable/fiber sections in single configuration.
- Well adapted to complex applications combining temperature and strain sections.

### > Powerful measurement data management

- Advanced data management, storage, interpretation and analysis.
- Full remote control capabilities of multiple instruments.



# Datasheet

## Superior measurement performance

The superior DITEST sensing technique offers fast and accurate strain and temperature measurements and its associated configuration flexibility makes the DITEST STA-R well adapted to demanding applications.

The use of stimulated Brillouin scattering in single mode fibers makes possible high spatial resolutions (down to 0.5 m) measurements with short updating times while offering long distance measurement capabilities with optimized performances in terms of spatial resolution and measurement resolution (see Figure 1).

The DITEST STA-R Series integrates an enhanced optical signal processing and a complete control of optical signal levels which are automatically adapted to the sensing conditions. This outstanding measurement flexibility leads to an unrivalled dynamic range (up to 20dB of optical budget) which guarantees that the measurement performance is maintained even in the case of large fiber losses.

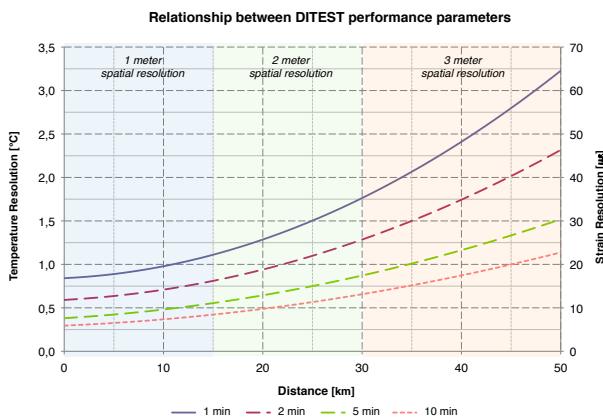


Figure 1: The measurement performance figure shows typical achievable performances in terms of temperature and strain resolution (2s repeatability) obtained with the designated typical recommended spatial resolution from 1 m to 3 m depending on the distance range. The performance specification of distributed monitoring system requires mentioning interrelated parameters such as distance, spatial resolution, acquisition time and fiber attenuation. The most appropriated performance description is a graphical presentation with the additional mention of the measurement settings.

“ Omnisens DITEST is especially suited to applications requiring fast acquisitions, long distance or high optical budget. ”

## Intelligent measurement configuration

The DITEST STA-R Series integrates an intelligent configuration routine which automatically configures the measurement parameters and optimizes each measurement with respect to targeted performance.

### Sensor auto configuration

Once a sensing fiber is connected to the instrument, the intelligent measurement configuration routine automatically adjusts the measurement settings such as:

- Distance and sampling interval
- Measurement contrast optimization
- Temperature and strain measurement range

### Measurement optimization

While measurements are being performed, the user has full flexibility to change the measurement parameters and to adapt them to specific situations or project requirements. Measurement parameters are:

- Spatial resolution / number of distance points
- Measurement repeatability / resolution
- Acquisition time

Measurements are made in a very simple way, since the instrument automatically controls and optimizes the measurement based on the required performance parameters defined by the user. Alternatively, a given acquisition time can be set by the user and the measurement configuration is automatically adjusted in order to maintain an optimized measurement resolution within the specified measurement updating time.

The system integrates self performance monitoring which provides information about the measurement quality of every temperature or strain profile and which ultimately is used to adapt the measurement settings in the case of varying sensing conditions.

## Omnisens SA

Riond Bosson 3, 1110 Morges – Switzerland  
T: +41 21 510 21 21 - F: +41 44 274 20 31  
sales@omnisens.com  
www.omnisens.com





## Datasheet

### Advanced graphical user interface

In practical applications, a sensing cable is often made of several different optical fibers or cable types with different characteristics and lay loss.

The instrument Graphical User Interface (GUI) allows the user to segment the monitoring distance in sections associated to different fiber characteristics (e.g. index of refraction, fiber excess length, temperature or strain sensor type, calibration coefficients, etc.) or segments (connectors, splices, etc) which can be modified during the acquisition.

A combination of multiple cable or fiber sections which can be either temperature or strain sensing sections is stored as one single configuration. In complex monitoring applications, this feature is especially powerful and guarantees an accurate mapping of the sensing locations taking into account the installation setup (e.g. fiber excess length, junction boxes, lead cable length, etc.).

The system includes a library of comprehensive pre-configured calibrated sensing elements featuring the most commonly used optical fibers and cable sensors. User-defined fiber sensor types can be added to the library to complement the provided database of sensors, whereas Omnisens can assist users in the calibration of specific sensing cables. An unlimited number of configurations can be stored in the database and exchanged between different DITEST instruments, which is useful for routine measurements, reducing the likelihood of differences in user criteria and ensuring fast setup and operation.

The DITEST STA-R combines the versatility and flexibility of a Test & Measurement instrument with the requirements of long term automatic and unattended monitoring. Measurement sequences using pre-defined configurations can be programmed and automatically recorded according to a scheduler. The instrument continuous performance monitoring is able to qualify and to store measurement quality indicators together with measurement data for further data analysis. Fiber breaks are also detected and located.

### Data management and versatility

The configurations and complete measurement data, including measurement settings and quality indicators, are stored in a dedicated database format enabling reliable data storage and easy retrieval for data interpretation.

Multiple measurement profiles can be compared, allowing the identification of the smallest relative deviations compared to predefined baseline or reference measurement. The GUI integrates advanced visualization tools for data sorting/filtering, advanced measurement analysis and measurement evolution as a function of time.

“ Omnisens DITEST STA-R: distributed temperature and strain monitoring has never been easier. ”

Measurement data can be exported to various format types.

The DITEST STA-R Series features complete remote control capabilities enabling instrument configuration, event diagnostic and maintenance through a TCP/IP connection.

Every project has its own specificity and the best performance is obtained by a careful selection of the sensing fiber cable and its integration. Omnisens provides customer support and assistance in the definition of the appropriate monitoring solution with respect to application requirements.

### Permanent monitoring solutions

Application oriented solutions based on DITEST measuring technique and appropriate fiber optic sensors have been developed aiming at offering turn-key solutions to specific industry problems such as:

**DITEST-AIM:** Asset Integrity Monitoring

**DITEST-LTM:** Long distance range Temperature Monitoring

**DITEST-SHM:** Structural Health Monitoring

**Contact us for more information.**

### Omnisens SA

Riond Bosson 3, 1110 Morges – Switzerland  
T: +41 21 510 21 21 - F: +41 44 274 20 31  
sales@omnisens.com  
www.omnisens.com



## DITEST STA-R features and performance

<b>Performance</b>	Number of channels	2 independent and selectable channels (standard) Compatible with up to 20 channel external switches - model SO-N (option)		
	Sensor configuration	Loop configuration (requires two fibers)		
	Sensing fiber	Standard single mode fibers		
	Distance range	50km		
	Spatial resolution* Typical	0.5 to 20 m (by increment of 0.1 m) 1 m at 20km / 2m at 30km / 3m at 50km		
	Distance resolution	0.1 m		
	Number of distance points	100'000		
	Optical Budget	Standard configuration: 10dB sensing (22dB total loop) High optical budget upon request: 20dB sensing (25dB total loop)		
	Measured variables	Temperature, strain, brillouin frequency shift, brillouin gain and width		
		<b>Brillouin Freq. shift</b>	<b>Temperature</b>	<b>Strain</b>
	Resolution	0.1 MHz	0.1 °C	2 με
	Range	10 GHz to 13 GHz	-273 °C to 700 °C limited by optical fiber	-3% compression to 3% elongation
		Measurement resolution/uncertainty: see fig.1		
Acquisition Time	> 20 seconds 1-2 minutes typical 5-10 minutes for high resolution measurements			
<b>Technical Data</b>	Graphical interface	SVGA 300 mm (12") color screen (1024 x 768)		
	Communication/Connectors	Ethernet port, USB, RS232, SPST output relays (alarm and system status)		
	Data storage	Internal hard disk (160 GB or more)		
	Data format	Database, text files		
	Optical connectors	E-2000 / APC		
	Operating temperature	0-40 °C		
	Dimensions (W x D x H)	449 x 500 x 266 mm (19" rack)		
	Weight	21 kg		
	Power supply	100-240 VAC / 50-60Hz / <200VA		
<b>Feature</b>	Measurement modes	Manual or automatic unattended measurements		
	Configuration	Automatic measurement configuration (self adjusting to varying conditions)		
	Data Analysis	Off-line data viewer software for measurement analysis, multiple trace comparison with respect to selectable baseline, measurement trends and time evolution, analysis at fixed distances, ...		
	Self Diagnosis	Long term operation 24/7 guaranteed by automatic recovery and continuous system monitoring including system status, measurement quality and fiber break detection		
	Laser safety	Omnisens DITEST products emit invisible infra-red radiation in the 1550 nm wavelength range classified to EN 60825-1(2001-03) as Class 1M laser products		

\* Spatial resolution defines the smallest event detected along the optical fiber and measured with 100% accuracy.

### DITEST is a trade mark of Omnisens

This document does not constitute an offer or contractual guarantee, we reserve the right to modify this data sheet without notice. Omnisens would be pleased to provide a detailed specification of performance tailored to your needs or application. Our continual improvement policy is your guarantee of the highest in quality, maintainability, and value for money.

### Omnisens SA

Riond Bosson 3, 1110 Morges – Switzerland  
T: +41 21 510 21 21 - F: +41 44 274 20 31  
sales@omnisens.com  
www.omnisens.com